


D-Link offers standard simplex & duplex patch cords in a variety of connectors & cables configurations. D-Link patch cords are available with full standard optical specifications, precise length tolerances. All assemblies are 100% inspected for optical characteristics and fiber end face finish.

The optical fiber patch cords are suitable for data communication, telecommunication applications. The terminated connectors in assemblies are designed to and are compatible with industry standards (IEC 61754/TIA/EIA). D-Link can deliver customized patch cords as per requirement.

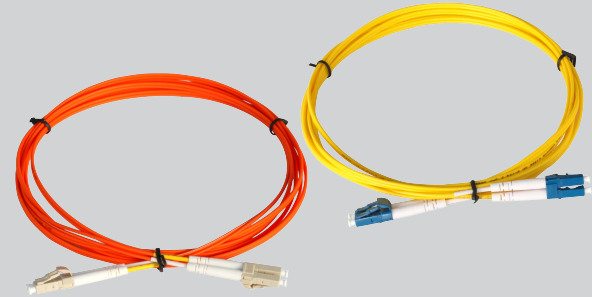

Features:

- Adopts high precision ceramic ferrule with good concentricity.
- Compact & strong crimping offers exceptional tensile strength in cable assemblies.
- 100% inspected for optical characteristics & fiber end face finish.
- Good performance endurance under changing circumstances.

SPECIFICATIONS

Connector Type		SC/ST/FC/LC/MTRJ	
Optical Fiber		Single Mode G652D	Multi Mode OM1,OM2,OM3,OM4
Cable Type		PVC & LSZH on request	
		3.0mm / 2.0mm	
Cable Color, Length		Yellow for Single-mode & Orange for Multi-mode & Aqua for Om3 1m, 2m & 3m. other lengths on request.	
Optical Specification	Insertion Loss	Typical: $\leq 0.2\text{dB}$, Max. 0.3dB (MTRJ: Max. 0.5dB)	Typical: $\leq 0.2\text{dB}$, Max. 0.3dB (MTRJ: Max. 0.5dB)
	Return Loss	PC $\geq 45\text{dB}$, UPC $\geq 50\text{dB}$, APC $\geq 60\text{dB}$ (SM)	$\geq 25\text{dB}$ (MM)
Mechanical Specification	Connector Ferrule	Ceramic	
	Repeatability	$\leq 0.2\text{dB}$ 1000 times mating cycles	
Working Temperature		-10°C $\sim +70^{\circ}\text{C}$	
Storage Temperature		-20°C $\sim +70^{\circ}\text{C}$	

ORDERING INFORMATION:

Type-Length	Single Mode (09µm-OS1)	Single Mode (09µm-OS2)	Multi Mode (62.5µm-OM1)	Multi Mode (50µm-OM2)	Multi Mode (51µm-OM3)
Simplex-1m	NCB-FS09S-STSC-1	NCB-FS10S-STSC-1	NCB-FM62S-STST-1	NCB-FM50S-STST-1	NCB-FM51S-STST-1
	NCB-FS09S-STST-1	NCB-FS10S-STST-1	NCB-FM62S-STSC-1	NCB-FM50S-STSC-1	NCB-FM51S-STSC-1
	NCB-FS09S-SCSC-1	NCB-FS10S-SCSC-1	NCB-FM62S-SCSC-1	NCB-FM50S-SCSC-1	NCB-FM51S-SCSC-1
	NCB-FS09S-LCSC-1	NCB-FS10S-LCSC-1	NCB-FM62S-MTST-1	NCB-FM50S-MTST-1	NCB-FM51S-MTST-1
	NCB-FS09S-LCLC-1	NCB-FS10S-LCLC-1	NCB-FM62S-MTSC-1	NCB-FM50S-MTSC-1	NCB-FM51S-MTSC-1
	NCB-FS09S-LCFC-1	NCB-FS10S-MTST-1	NCB-FM62S-MTMT-1	NCB-FM50S-MTMT-1	NCB-FM51S-MTMT-1
	NCB-FS09S-MTSC-1	NCB-FS10S-MTSC-1	NCB-FM62S-LCST-1	NCB-FM50S-LCST-1	NCB-FM51S-LCSC-1
	NCB-FS09S-MTST-1	NCB-FS10S-MTMT-1	NCB-FM62S-LCSC-1	NCB-FM50S-LCSC-1	NCB-FM51S-LCLC-1
	NCB-FS09S-MTMT-1	—	NCB-FM62S-LCLC-1	NCB-FM50S-LCLC-1	—
	—	—	—	—	—
Duplex-1m	NCB-FS09D-STST-1	NCB-FS10D-STST-1	NCB-FM62D-STST-1	NCB-FM50D-STST-1	NCB-FM51D-STST-1
	NCB-FS09D-SCSC-1	NCB-FS10D-SCSC-1	NCB-FM62D-STSC-1	NCB-FM50D-STSC-1	NCB-FM51D-STSC-1
	NCB-FS09D-STSC-1	NCB-FS10D-STSC-1	NCB-FM62D-SCSC-1	NCB-FM50D-SCSC-1	NCB-FM51D-SCSC-1
	NCB-FS09D-STFC-1	NCB-FS10D-STFC-1	NCB-FM62D-MTST-1	NCB-FM50D-MTST-1	NCB-FM51D-MTST-1
	NCB-FS09D-SCFC-1	NCB-FS10D-SCFC-1	NCB-FM62D-MTSC-1	NCB-FM50D-MTSC-1	NCB-FM51D-MTSC-1
	NCB-FS09D-LCST-1	NCB-FS10D-LCST-1	NCB-FM62D-MTMT-1	NCB-FM50D-MTMT-1	NCB-FM51D-MTMT-1
	NCB-FS09D-LCSC-1	NCB-FS10D-LCSC-1	NCB-FM62D-LCST-1	NCB-FM50D-LCSC-1	NCB-FM51D-LCSC-1
	NCB-FS09D-LCLC-1	NCB-FS10D-LCLC-1	NCB-FM62D-LCSC-1	NCB-FM50D-LCLC-1	NCB-FM51D-LCLC-1
	NCB-FS09D-LCFC-1	NCB-FS10D-MTST-1	NCB-FM62D-LCLC-1	NCB-FM50D-LCST-1	—
	NCB-FS09D-MTST-1	NCB-FS10D-MTSC-1	—	—	—
	NCB-FS09D-MTSC-1	NCB-FS10D-MTMT-1	—	—	—
	NCB-FS09D-MTMT-1	—	—	—	—
	—	—	—	—	—
	—	—	—	—	—
—	—	—	—	—	
LSZH	—	—	—	—	—
Simplex-1m	NCB-FS09S-STSC-1-LS	NCB-FS10S-STSC-1-LS	NCB-FM62S-STST-1-LS	NCB-FM50S-STST-1-LS	NCB-FM51S-STST-1-LS
	NCB-FS09S-STST-1-LS	NCB-FS10S-STST-1-LS	NCB-FM62S-STSC-1-LS	NCB-FM50S-STSC-1-LS	NCB-FM51S-STSC-1-LS
	NCB-FS09S-SCSC-1-LS	NCB-FS10S-SCSC-1-LS	NCB-FM62S-SCSC-1-LS	NCB-FM50S-SCSC-1-LS	NCB-FM51S-SCSC-1-LS
	NCB-FS09S-LCSC-1-LS	NCB-FS10S-LCSC-1-LS	NCB-FM62S-MTST-1-LS	NCB-FM50S-MTST-1-LS	NCB-FM51S-MTST-1-LS
	NCB-FS09S-LCLC-1-LS	NCB-FS10S-LCLC-1-LS	NCB-FM62S-MTSC-1-LS	NCB-FM50S-MTSC-1-LS	NCB-FM51S-MTSC-1-LS
	NCB-FS09S-LCFC-1-LS	NCB-FS10S-MTST-1-LS	NCB-FM62S-MTMT-1-LS	NCB-FM50S-MTMT-1-LS	NCB-FM51S-MTMT-1-LS
	NCB-FS09S-MTST-1-LS	NCB-FS10S-MTSC-1-LS	NCB-FM62S-LCST-1-LS	NCB-FM50S-LCSC-1-LS	NCB-FM51S-LCSC-1-LS
	NCB-FS09S-MTSC-1-LS	NCB-FS10S-MTMT-1-LS	NCB-FM62S-LCSC-1-LS	NCB-FM50S-LCLC-1-LS	NCB-FM51S-LCLC-1-LS
	NCB-FS09S-MTMT-1-LS	—	NCB-FM62S-LCLC-1-LS	NCB-FM50S-LCST-1-LS	—
	—	—	—	—	—

Type-Length	Single Mode (09µm-OS1)	Single Mode (09µm-OS2)	Multi Mode (62.5µm-OM1)	Multi Mode (50µm-OM2)	Multi Mode (51µm-OM3)
Duplex-1m	NCB-FS09D-STST-1-LS	NCB-FS10D-STST-1-LS	NCB-FM62D-STST-1-LS	NCB-FM50D-STST-1-LS	NCB-FM51D-STST-1-LS
	NCB-FS09D-SCSC-1-LS	NCB-FS10D-SCSC-1-LS	NCB-FM62D-STSC-1-LS	NCB-FM50D-STSC-1-LS	NCB-FM51D-STSC-1-LS
	NCB-FS09D-STSC-1-LS	NCB-FS10D-STSC-1-LS	NCB-FM62D-SCSC-1-LS	NCB-FM50D-SCSC-1-LS	NCB-FM51D-SCSC-1-LS
	NCB-FS09D-STFC-1-LS	NCB-FS10D-STFC-1-LS	NCB-FM62D-MTST-1-LS	NCB-FM50D-MTST-1-LS	NCB-FM51D-MTST-1-LS
	NCB-FS09D-SCFC-1-LS	NCB-FS10D-SCFC-1-LS	NCB-FM62D-MTSC-1-LS	NCB-FM50D-MTSC-1-LS	NCB-FM51D-MTSC-1-LS
	NCB-FS09D-LCST-1-LS	NCB-FS10D-LCST-1-LS	NCB-FM62D-MTMT-1-LS	NCB-FM50D-MTMT-1-LS	NCB-FM51D-MTMT-1-LS
	NCB-FS09D-LCSC-1-LS	NCB-FS10D-LCSC-1-LS	NCB-FM62D-LCST-1-LS	NCB-FM50D-LCSC-1-LS	NCB-FM51D-LCSC-1-LS
	NCB-FS09D-LCLC-1-LS	NCB-FS10D-LCLC-1-LS	NCB-FM62D-LCSC-1-LS	NCB-FM50D-LCLC-1-LS	NCB-FM51D-LCLC-1-LS
	NCB-FS09D-LCFC-1-LS	NCB-FS10D-MTST-1-LS	NCB-FM62D-LCLC-1-LS	NCB-FM50D-LCST-1-LS	-
	NCB-FS09D-MTST-1-LS	NCB-FS10D-MTSC-1-LS			
	NCB-FS09D-MTSC-1-LS	NCB-FS10D-MTMT-1-LS			
	NCB-FS09D-MTMT-1-LS				

Type-Length	Single Mode (09µm-OS1)	Single Mode (09µm-OS2)
Simplex APC	NCB-FS09S-SCSC-1-APC	NCB-FS10S-SCSC-1-APC
	NCB-FS09S-SCLC-1-APC	NCB-FS10S-SCLC-1-APC
	NCB-FS09S-LCLC-1-APC	NCB-FS10S-LCLC-1-APC
	NCB-FS09S-FCFC-1-APC	NCB-FS10S-FCFC-1-APC
Duplex APC	NCB-FS09D-SCSC-1-APC	NCB-FS10D-SCSC-1-APC
	NCB-FS09D-SCLC-1-APC	NCB-FS10D-SCLC-1-APC
	NCB-FS09D-LCLC-1-APC	NCB-FS10D-LCLC-1-APC
	NCB-FS09D-FCFC-1-APC	NCB-FS10D-FCFC-1-APC

*Other length available on request

** OM3 2m Patch Cord Part code - NCB-FM52X-YYYY-2

OM3 3m Patch Cord Part code - NCB-FM53X-YYYY-3

X denotes - Simplex / Duplex Type

YYYY denotes - Connector Type

D-Link (India) Limited
Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2023 D-Link Corporation. All rights reserved. Release 01 (May 2023)